



RADIOCOMANDO

LED 230V


- IT** Sistema di controllo ON/OFF wireless a radio frequenza - Sistema composto da: centralina con cavo e spina e telecomando con supporto a muro
- EN** ON/OFF wireless radiofrequency control unit - The system includes: a control unit with cable and plug and a remote control with wall bracket
- DE** Kabellose Ein/Aus Radiofrequenz-Einheit - Das System besteht aus: aus Relaisstation mit Kabel und Steckdose und Fernsteuerung mit Wandhalterung

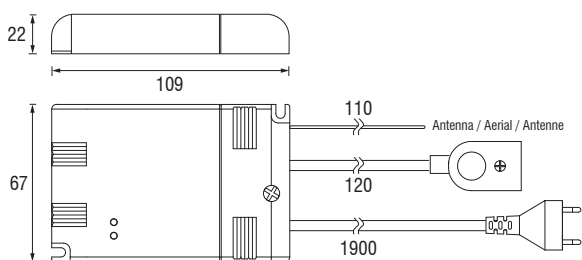


Ⓐ Centralina
Control Unit / Relaisstation

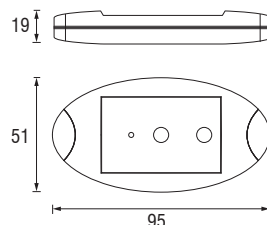

Ⓑ Telecomando IR
IR Remote control / IR Fernsteuerung



Ⓒ Supporto a muro
Wall bracket / Wandhalterung

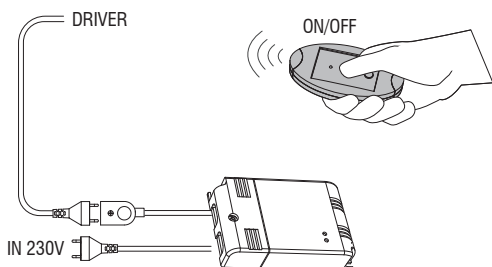

Frequenza - Frequency - Frequenz:
Trasmissione - Transmission - Sender 434Mhz ASK Quarzo SAW
Ricezione - Reception - Empfangs 434Mhz ASK

Portata: 100m (Area libera) - Range: 100m (Nominal) - Reichweite: 100m (nominal)

Imballo - Packaging - Verpackung			
Codice - Part no. - Artikel-Nr.	Pcs	Kg	mm
185050	1	0,345	84x96x175

Carico applicabile: 250W* Resistivo - Max Wattage: 250W* Resistive - Wattleistung: 250W* ohmsche Last


* oppure n°2 Alimentatori per LED/Fluorescenza (max 70W) - or n°2 LED/Fluorescent Drivers (max 70W) - oder Nr.2 Konverter für LED/Leuchtstoffröhre (70W max)



Ⓐ Centralina
Control unit - Relaisstation



Ⓑ Radiocomando (telecomando)
Remote Control / Fernsteuerung



Ⓒ Supporto a muro
Wall bracket / Wandhalterung