






# GEO xT-B

LED 24V - 19W/m

- IT** **Lampada di servizio con interruttore** - Supporto in alluminio ossidato completo di schermo in policarbonato opalino e fissaggi laterali regolabili.
- EN** **Service lamp with switch** - Aluminium structure complete with opaline polycarbonate screen and side fixing brackets.
- DE** **Dienstleuchte mit Schalter** - Alu-Struktur aus Polykarbonat (opalen) und seitlichen Befestigungslaschen.

75-80 lm/W PHOTOBIOLOGICAL  
CLASS 0 CRI>80

CE ENEC IP40

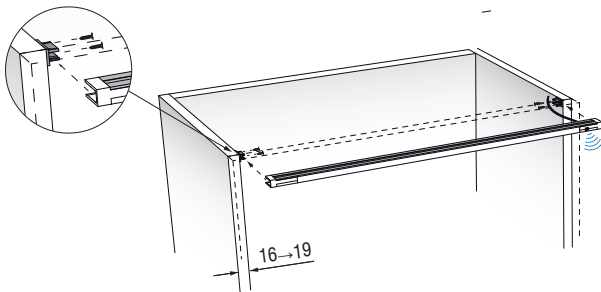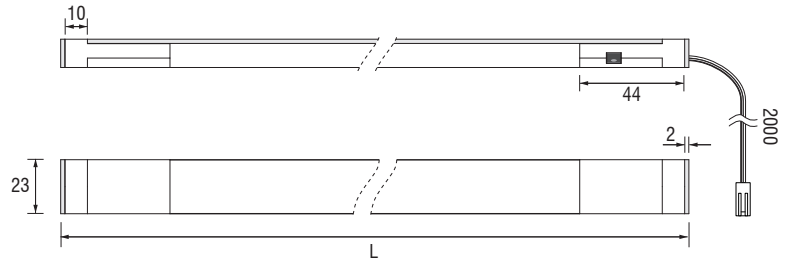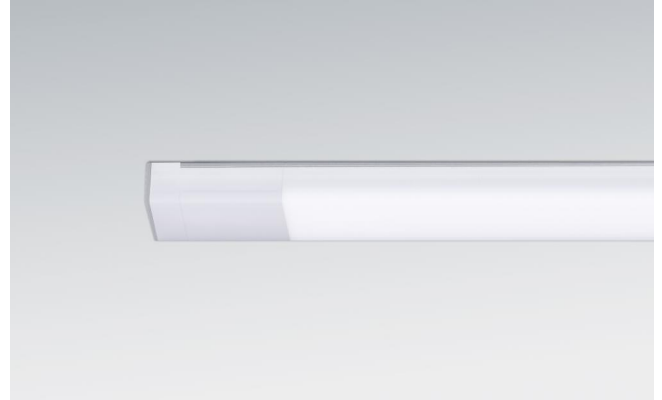

L	W	3000 K		4000 K		Imballo - Packaging - Verpackung		
		Codice - Part no. - Artikel-Nr.	EEC	Codice - Part no. - Artikel-Nr.	EEC	Pcs	Kg	mm
412	5,70W	175XTB0450W1B19	A+	175XTB0450N1B19	A+	1	0,175	30 x 35 x 600
462	6,65W	175XTB0500W1B19	A+	175XTB0500N1B19	A+	1	0,185	30 x 35 x 600
562	8,55W	175XTB0600W1B19	A+	175XTB0600N1B19	A+	1	0,210	30 x 35 x 600
762	12,35W	175XTB0800W1B19	A	175XTB0800N1B19	A	1	0,250	30 x 35 x 900
862	14,25W	175XTB0900W1B19	A	175XTB0900N1B19	A	1	0,295	30 x 35 x 1000
1162	19,95W	175XTB1200W1B19	A	175XTB1200N1B19	A	1	0,385	30 x 35 x 1200

Dimensioni in millimetri (mm) / Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)  
Alimentatore non incluso / Driver not included / LED-Konverter nicht inbegriffen

Connettore  
Connector / Verbindungsstecker

