





ODO 3.0

LED 24V - 11,4W/m

- IT** **Lampada senza interruttore** - Profilo in alluminio per installazione ad incasso completo di terminali di chiusura e schermo in policarbonato opalino. Esclusivamente su misura.
- EN** **Lamp without switch** - Aluminium profile for flush mounting complete with end caps and opaline polycarbonate screen. Custom measures only.
- DE** **Leuchte ohne Schalter** - Alu-Einbauprofil Komplett mit Endstücken und Schirm aus Polycarbonat (opalen). Nur maßgeschneiderte.

108-118 lm/W PHOTOBIOLOGICAL CLASS 0 CRI>80

CE ENEC IP20

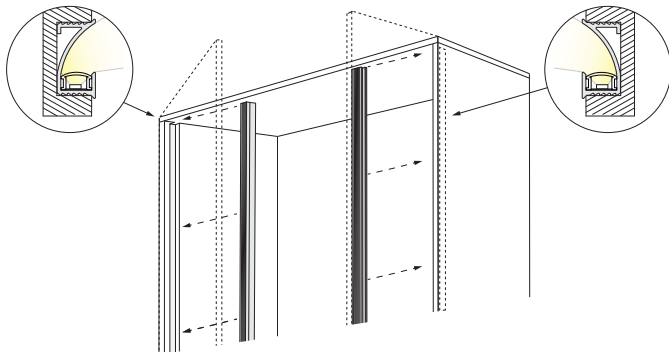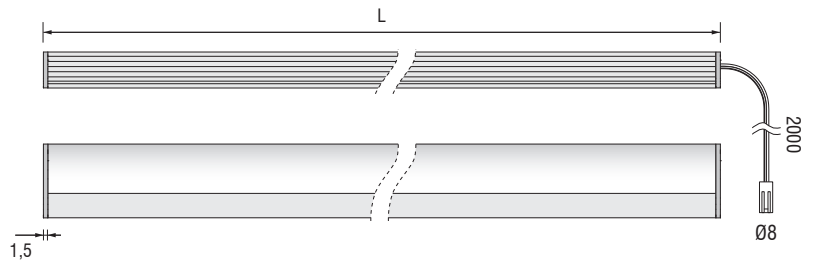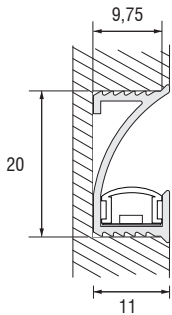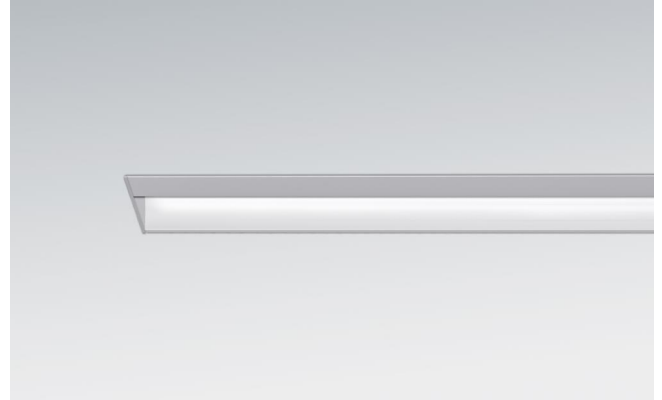

Esclusivamente su misura - Custom measures only - Nur maßgeschneiderte

L	3000 K		4000 K	
min - max	Codice - Part no. - Artikel-Nr.	EEC	Codice - Part no. - Artikel-Nr.	EEC
300 - 3000	162001	A	162002	A

Dimensioni in millimetri (mm) / Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)
 Alimentatore non incluso / Driver not included / LED-Konverter nicht inbegriffen

Connettore
 Connector / Verbindungsstecker

