




# SKY xT

LED 24V - 11,4W/m

- IT** **Lampada senza interruttore** - Profilo in policarbonato opalino per libera installazione, completo di terminali di chiusura e clip di fissaggio in policarbonato dissipatore in alluminio.
- EN** **Lamp without switch** - Opaline polycarbonate profile for surface mounting, complete with polycarbonate end caps and fixing clips aluminium heat sink.
- DE** **Leuchte ohne Schalter** - Anbauprofil aus Polykarbonat (opalen), mit Endkappen und Befestigungsclips aus Polykarbonat Alu-Wärmeableiter.

108-118 lm/W PHOTOBIOLOGICAL CLASS 0 CRI>80

CE EAC     IP40

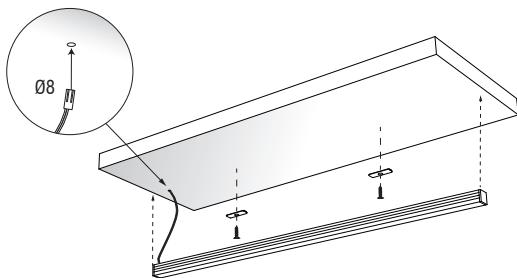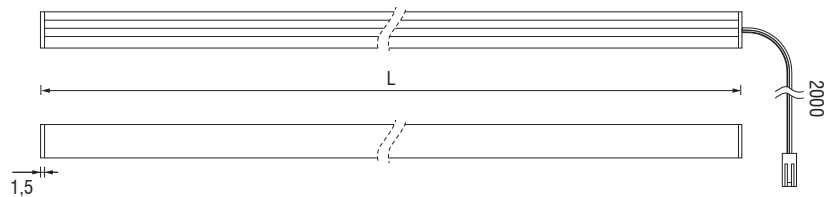

L	W	3000 K		4000 K		Imballo - Packaging - Verpackung		
		Codice - Part no. - Artikel-Nr.	EEC	Codice - Part no. - Artikel-Nr.	EEC	Pcs	Kg	mm
450	4,85W	182SX0450W	A	182SX0450N	A	1	0,100	30 x 35 x 600
600	6,56W	182SX0600W	A	182SX0600N	A	1	0,115	30 x 35 x 600
900	9,98W	182SX0900W	A	182SX0900N	A	1	0,170	30 x 35 x 900
1200	13,40W	182SX1200W	A	182SX1200N	A	1	0,230	30 x 35 x 1200

SKY xT 600mm LED 24V-11,4W/m	LUX
250mm	980
500mm	350
750mm	175
1000mm	105

Dimensioni in millimetri (mm) / Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)  
 Alimentatore non incluso / Driver not included / LED-Konverter nicht inbegriffen

Connettore  
 Connector / Verbindungsstecker

